

Conveniently SAFE and SECURE Living... Smart Living



Active reader
20-25m Range



Active reader
directional antenna
up to 50m Range



Active tags



Passive tags for
steel car body



Passive tags



Passive RFID
Long range reader
up to 15m Range

Gate Entry




Sliding Gate



Swing Gate

Gates must have an automatic way of opening and closing to insure security and to prevent unauthorized tailgating. Relying upon the vehicle operator to manually close the gate is not practical and subjects the controlled area to security breaches. This is especially true for multi-occupancy parking facilities and villas.

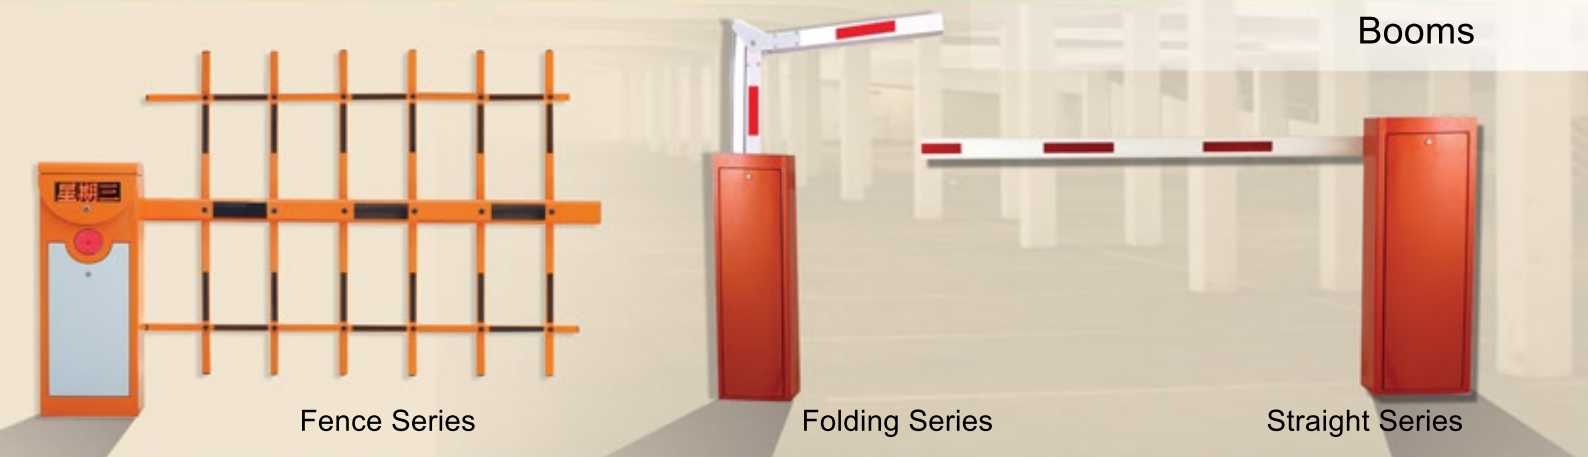

Booms

Fence Series

Folding Series

Straight Series



Swing Gate Motor

AC motor, move the gate up to 300kgs, 2.5meters
 Motor Speed: 1400n/min
 Travel Speed: 18 sec
 Protection grade: IP44
 Working Temperature: -25°C/+75°C
 Auto&Manual Release
 Gross Weight: 18kg
 Max Weight of Wing: 300kg
 Max Length of Wing: 2.5m
 Max Opening angle of Wing: 110°



Steel Rack

Sliding Gate Motor

AC motor 220V/110V DC 24V
 move the gate up to 1600KGS
 Motor Speed:(220v)1300±50n/m
 (110V)1430±50n/m
 Gear Speed: 48rpm
 Travel Speed: 13.4 m/min
 Motor Making Technique: die casting
 aluminum alloy with steel rack
 Auto&Manual Release with low noise
 and high speed



32m Loop

Single & Double loop detector

Standard: AC220V/110V,
 Loop: 32 M
 Optional: AC&DC 24V/12V



Three-button remote transmitter.

Used to open any two opening devices. The antenna will add up to 30m for your receiver depending on conditions. It is convenient to hold it in your pocket.



Door Access (Stand Alone)

Voltage: 9-14V
 LED Light Indicator for power status.
 Lock state detection
 EM ,Card, password, password+card, Wireless remote Control.
 Up to 8000 datas capacity



Standing Infra Red Sensor

Microprocessor based
 12VDC operation allowing for battery
 back-up
 Non-volatile memory storage
 Fully programmable via the keypad
 Relay outputs